


BULK TYPE SWITCHES | TACT SWITCHES

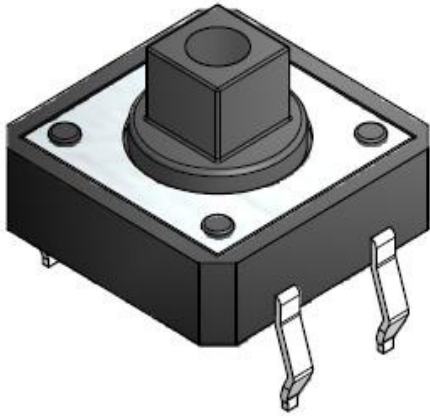


[1103C]




Typical Specifications

1. Rating : DC12V 50mA
2. Travel : 0.3 ± 0.1 mm
3. Contact Resistance : 100m Ω Max.
4. Bounce : 10m SEC MAX.
5. Operating Force
 - * 1103C-1 : 130 ± 30 gf [300,000Cycle]
 - * 1103C-2 : 180 ± 50 gf [300,000Cycle]
 - * 1103C-3 : 250 ± 50 gf [100,000Cycle]

OUTLINE DRAWING



CIRCUIT DIAGRAM



P.C.B MOUNTING HOLES

