

SMD TYPE SWITCHES | TACT SWITCHES






[1103S]

Typical Specifications


1. Rating : DC12V 50mA
2. Travel : 0.3 ± 0.1 mm
3. Contact Resistance : $100\text{m}\Omega$ Max.
4. Bounce : 10m SEC MAX.
5. Operating Force
 - * 1103S-1 : 130 ± 30 gf [300,000Cycle]
 - * 1103S-2 : 160 ± 50 gf [300,000Cycle]
 - * 1103S-3 : 250 ± 50 gf [100,000Cycle]

Model No.	□ M(mm)
1103S	4,3
1103SB	7,7
1103SF	9,5
1103SFH	8,5

OUTLINE DRAWING

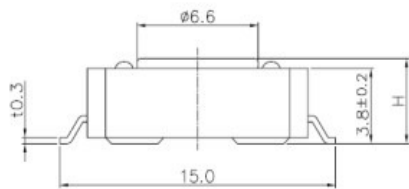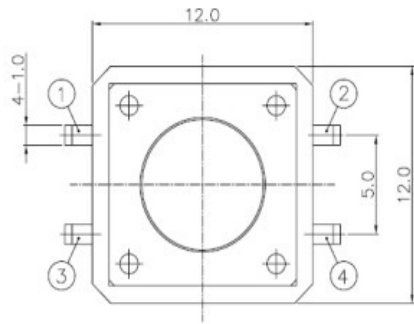

CIRCUIT DIAGRAM



P.C.B LAND PATTERN

