


BULK TYPE SWITCHES | TACT SWITCHES

[1103T]

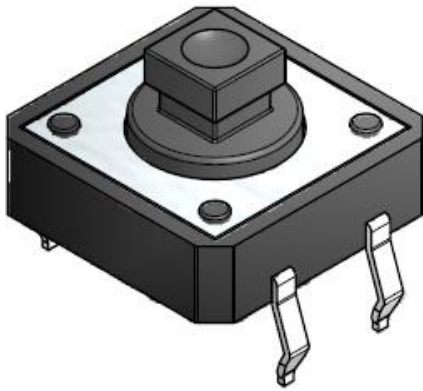


Typical Specifications




1. Rating : DC12V 50mA
2. Travel : 0.3 ± 0.1 mm
3. Contact Resistance : 100m Ω Max.
4. Bounce : 10m SEC MAX.
5. Operating Force
 - * 1103T-1 : 130 ± 30 gf [300,000Cycle]
 - * 1103T-2 : 180 ± 50 gf [300,000Cycle]
 - * 1103T-3 : 250 ± 50 gf [100,000Cycle]

Model No.	□ M(mm) / □ N(mm)
1103T	3.8 / 3.0
1103TA	3.3 / 2.5

OUTLINE DRAWING

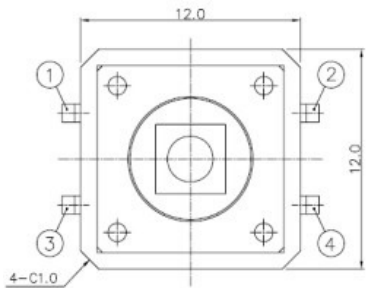

CIRCUIT DIAGRAM

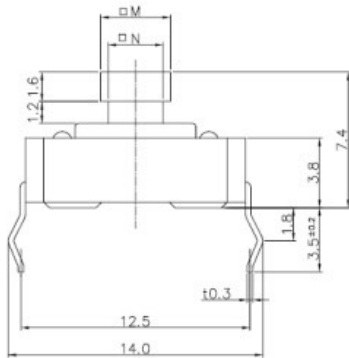

P.C.B MOUNTING HOLES

