


[1107GS]


Typical Specifications

1. Rating : DC12V 50mA
 2. Travel : 0.25 ± 0.1 mm
 3. Contact Resistance : 100m Ω Max.
 4. Bounce : 10m SEC MAX.
 5. Operating Force
 - * 1107GS-1 : 130 ± 30 gf [50,000Cycle]
 - * 1107GS-2 : 180 ± 50 gf [50,000Cycle]
 - * 1107GS-3 : 250 ± 50 gf [30,000Cycle]
- ▶ 6.1* 3.7mm square thin type:2.5mm in height
 - ▶ Excellent clear click feeling due to tactile feedback characteristic.
 - ▶ Reflow soldering applicable
 - ▶ Dust proof construction
 - ▶ Available for tape and reel package
 - ▶ Operating push-button switches for portable CD players

OUTLINE DRAWING

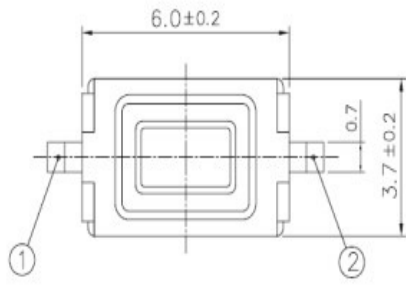

CIRCUIT DIAGRAM



P.C.B LAND PATTERN

