




[1109S]

Typical Specifications


1. Rating : DC12V 50mA
2. Travel : 0.25 ± 0.1 mm
3. Contact Resistance : 100m Ω Max.
4. Bounce : 10m SEC MAX.
5. Operating Force
 - * 1109S-0 : 100 ± 30 gf [1,000,000Cycle]
 - * 1109S-1 : 130 ± 30 gf [500,000Cycle]
 - * 1109S-2 : 160 ± 50 gf [50,000Cycle]
 - * 1109S-3 : 250 ± 50 gf [30,000Cycle]

Model No.	□ M(mm)
1109S	3,8
1109SA	7,0

OUTLINE DRAWING

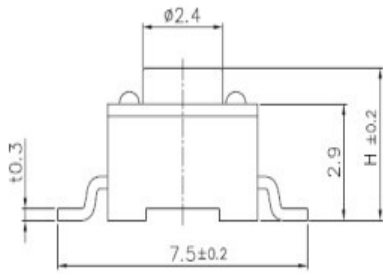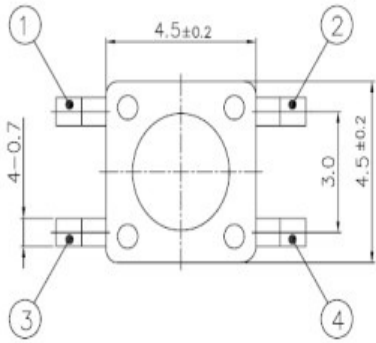

CIRCUIT DIAGRAM



P.C.B MOUNTING HOLES

