


DETECTOR SWITCHES | DETECTOR SWITCHES

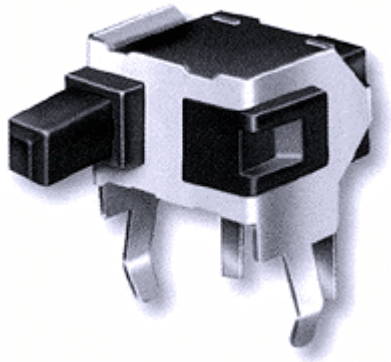

[1120PB]

Typical Specifications

1. Rating : DC 30V 0.1A
2. Circuit : 1C-1P
3. Timing : Non-Shorting
4. Travel : 0.8±0.1
5. Contact Resistance : 40 gf max
6. Operating Life : 50,000 Cycles

PART	MATERIAL
TERMINAL	PHOSPHOR BRONZE
CASE	NYLON66
CLIP	PHOSPHOR-BRONZE
ACTUATOR	ACETAL
BRACKET	ELECTRO TEMPLATE
COVER	NYLON66

Features

Light operating force : 40gf max.

Highly reliable contact through our own self-wiping leaf contact construction

Available for vertical and horizontal type

Application

Detecting the insertion of various media

Identification of tapes in VCR, cassette deck, etc

Detecting the operation of VCR, cassette mechanism, etc

Order Code Explanation

1120

SPRING STYLE

HORIZONTAL(BRACKET)TYPE

KNOB POSITION
A : RIGHT
B : LEFT

COIL SPRING TYPE : No Item
SPRING PLATE TYPE : P

OUTLINE DRAWING

