


BULK TYPE SWITCHES | PUSH SWITCHES

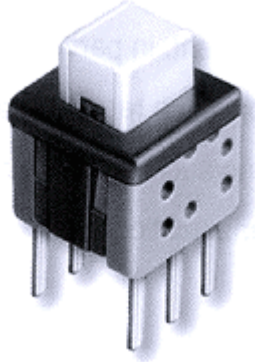

[2216F]

Typical Specifications

1. Rating : DC 30V 0.1A
2. Circuit : 2C-2P / 2C-1P(CASE COLOR:BLUE)
3. Timing : Shorting or Non-Shorting
4. Travel : Lock-Stroke : 1.0mm
Full-Stroke : 1.9mm
5. Contact Resistance : 100m Ω Max
6. Operating Life : 50,000 Cycles

PART	MATERIAL
TERMINAL	BRASS
CASE	NYLON 66
PUSH	ACETAL
PUSH PLATE	PHOSPHOR BRONZE
COVER	ACETAL
SPRING	STAINLESS STEEL
CAMSTICK	STAINLESS STEEL

Features


- ▶ Vertical mounting on P.C.Board.
- ▶ 1.0mm travel
- ▶ Timing is shorting and non shorting

Application

- ▶ Audio equipment in general

Order Code Explanation

2216F

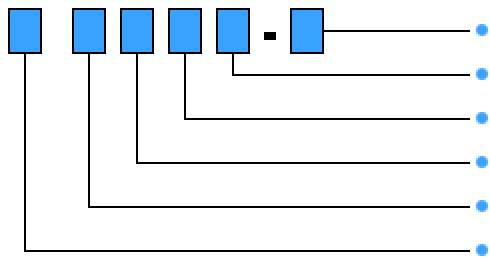

ITEM	CODE
Operating Force:180gf, 250gf	1, 2
Self-lock, Non-lock	L, F
Push color : White, Gray, Black	W, G, B
Cover color : White, Gray, Black	W, G, B
Case color: White,Gray,Black,Blue(2C-1P)	W, G, B, E
Timing : Shorting, Non-shorting	S, N

OUTLINE DRAWING

